


KUBOTA ZERO TAIL SWING COMPACT EXCAVATOR U17-3



AVAILABLE WITH:


- Half-hitch and ripper
- Digging buckets– 300mm and 450mm
- Mud bucket– 900mm

DIMENSIONS (mm)

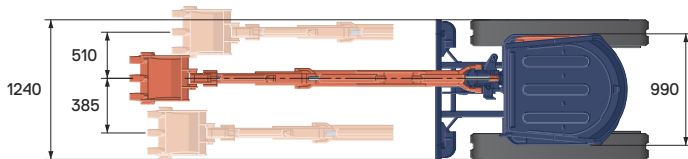


Operating weight*:
1675 kg

* Including operator's weight @ 75 kg

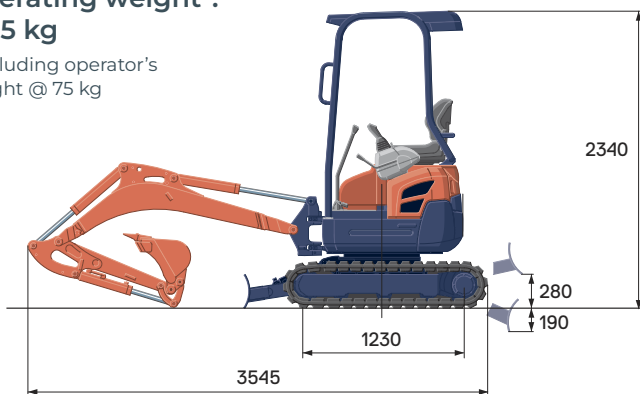

WORKING RANGE

Model	U17-3
A Max. digging height	mm 3540
B Max. dumping height	mm 2440
C Max. digging depth	mm 2310
D Max. vertical digging depth	mm 1680
E Max. digging radius, at ground level	mm 3840
F Max. digging radius	mm 3900
G Min. turning radius w/o swing	mm 1440
with swing	mm 1215
H Min. tail turning radius	mm 620

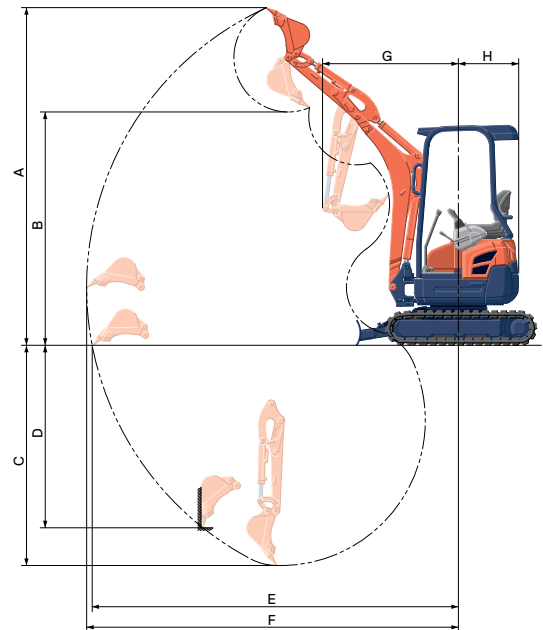

LIFTING CAPACITY

LIFT POINT HEIGHT (mm)		LIFTING CAPACITY OVER-FRONT BLADE DOWN			LIFTING CAPACITY OVER-SIDE		
		unit=ton			unit=ton		
		LIFT POINT RADIUS (kgs)			LIFT POINT RADIUS (kgs)		
		2	2.5	3	2	2.5	3
GL	2	0.28	0.32	–	0.28	0.24	–
	1.5	0.40	0.36	0.32	0.33	0.24	0.18
	1	0.55	0.41	0.33	0.31	0.23	0.17
	0	0.58	0.43	0.32	0.29	0.21	0.17

